

AI BASED TOOLS FOR VERIFICATION & VALIDATION


The fastest way to build reliable
embedded software



 DEVELOPAIR



Challenges embedded SW development

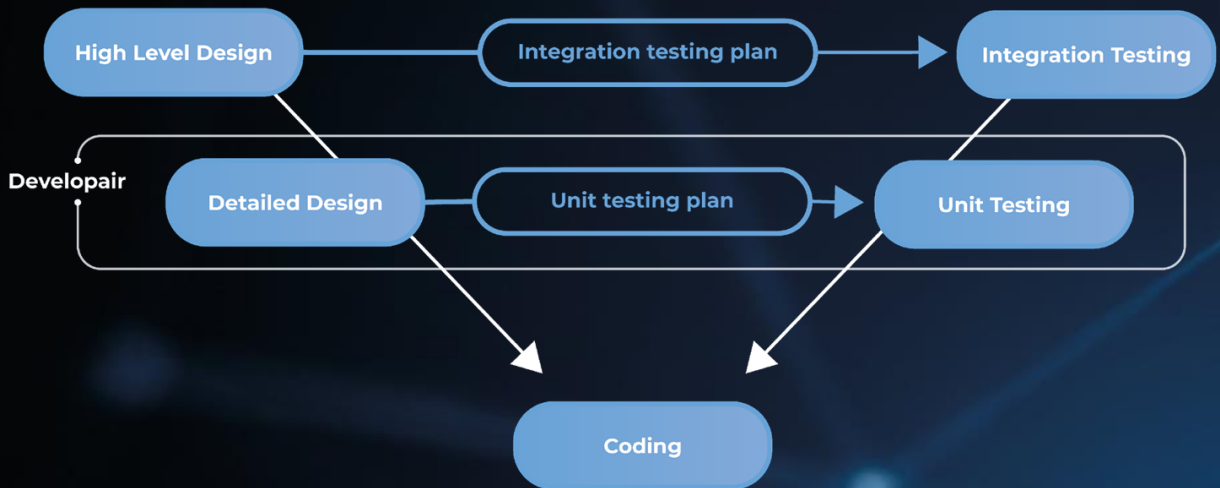

Cost and development time pressure: high dedication in the verification and validation phases.



Regulatory compliance: quality and reliability issues.



Opportunity cost: high dedication to low value-added tasks like unit testing.



Attracting talent: difficulty in finding embedded SW developers.

Areas of application

For companies aiming at improving their software development process or at fulfilling functional safety regulations in an efficient way. We can support:

Industry: IEC 61508



Railway: EN50128



Road vehicles: ISO 26262



Medical devices: IEC 62304



Aviation: DO-178C



The certified tool fulfills the requirements for support tools classified T2 according to IEC 61508-3 and EN 50128. The tool is qualified to be used in safety-related software development according to IEC 61508, EN 50128 and ISO 26262. It is suitably validated for use in safety-related development according to IEC 62304.

E.g. companies that develop SW that controls the brakes of a train, industrial machinery, power electronics, the ABS of a car or even a pacemaker.

Our solution



A software tool that **Automates Verification & Validation** activities of **embedded software**.



Based on unique blend of **Symbolic** and **Generative AI** techniques to ensure **flexibility, traceability, dependability and reliability**.

Features



Smart editor for Software requirements with AI assistance: an easy and intuitive way of defining requirements.



Automatic verification of requirements to detect errors, inconsistencies and conflicts.



Automatic test generation based on SW requirements.



Seamless integration with requirements and tests management tools.

Benefits



30-50% reduction in SW development costs.



Reduction of SW development times **by up to 50%**.



Reduction of nonconformity **costs and regulatory** compliance issues.



Reduction of **opportunity cost**: 3 out of 10 engineers reassigned to high value-added tasks.

SMART EDITOR

An easy-to-use editor to ensure the quality of software requirements. With support of natural language patterns and graphical specification models, like finite state machines (FSM), providing:

- **Reduced ambiguity in the requirements.**
- **Greater standardization**

Other problems associated with non-restricted natural language requirements are:

- **Vagueness**
- **Complexity**
- **Untestability**
- **Omission**
- **Duplication**
- **Wordiness**
- **Inappropriate implementation**

The editor includes a smart assistant that automatically generates requirements in Rely from a description in natural language or requirements in other formats.

AUTOMATIC TEST GENERATION



Business pain:

manual generation of software unit tests is a repetitive, costly, time-consuming and low value-added process.



Solution:


with the Automatic test generation module, it is possible to auto-generate the tests from the requirements in a few seconds or minutes.



Benefits:


this improves test quality by avoiding human errors, reduces time and cost, and allows engineers to focus on high value-added tasks. The lower cost per test also allows more tests to be performed, increasing safety, reliability and dependability.

Architecture definition

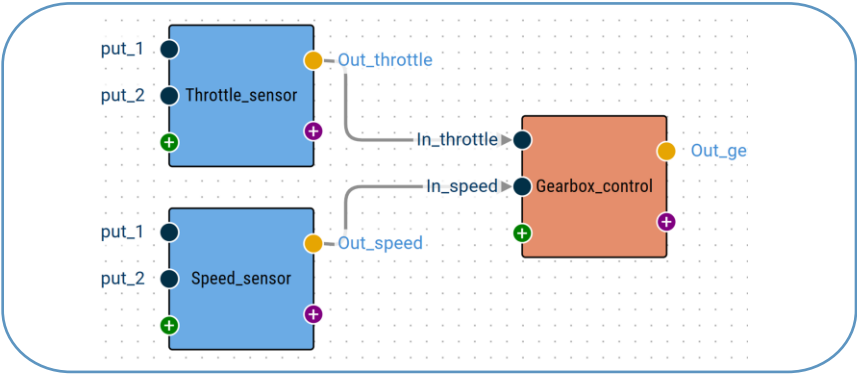

Architecture editor: it supports multilevel approaches and allows you to graphically define system components and interfaces.

Smart requirement editor

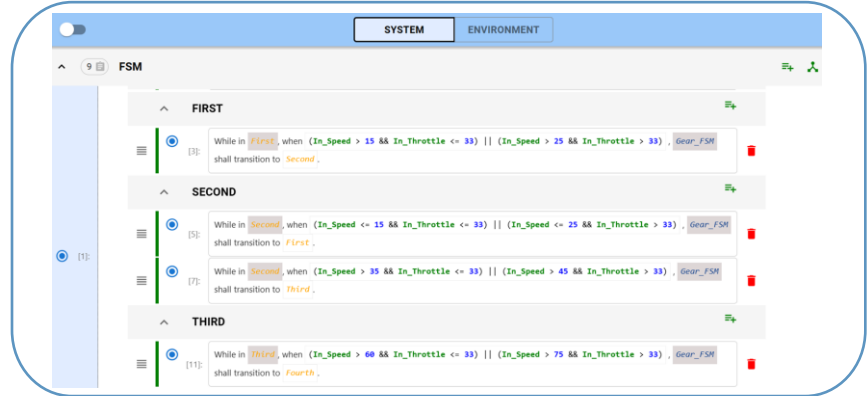

Rely: Developair provides a specification language that allows you to **easily define requirements** in **restricted natural language** and **favoring standardization**.

Smart assistant based on Generative AI

SMART REQUIREMENT GENERATION RESULTS

A minor error (var_train_errors.minor) must be activated if cabin is not active but direction is not none, otherwise, minor error must be false.

On ERROR state on rising edge removes internal fatal errors (var_train_errors.fatal).

In error state, if the output major error (out_train_errors.major) is active for 4 cycles record an internal fatal error is recorded.

GENERATED REQUIREMENTS

```
when in_cabin_data.active_cabin == false &&
[R26] in_cabin_data.direction != not_assigned the system shall
satisfy var_train_errors.minor == true.


when in_cabin_data.active_cabin == true ||
[R27] in_cabin_data.direction == not_assigned the system shall
satisfy var_train_errors.minor == false.

when fsm_var == ERROR && _prev(fsm_var) != ERROR the
[R28] system shall satisfy var_train_errors.fatal == false.

when fsm_var == ERROR && out_train_errors.major == true
[R29] for 4 cycles the system shall satisfy var_train_errors.fatal ==
true.
```

Smart assistant for defining requirements: the generative AI-based assistant can automatically generate requirements in Rely from requirements in other formats or a description in natural language. Besides creating requirements, the assistant can also detect if new elements such as data types, variables, inputs or outputs need to be created.

Automatic verification of requirements

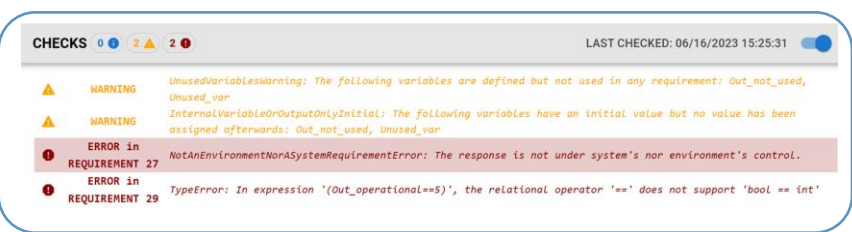

Smart error detection: it provides double-stage feedback by detecting in real time simple errors, such as undefined variables or incompatible data types, and complex errors such as conflicts between requirements or potentially undesired behaviors, when launching the verification.

Testing workflow with Developair

Thanks to our advanced algorithms test are automatically generated with the push of a button.



Seamless integration with requirements management tools and architecture definition tools.

Developair includes connectors to tools like **IBM DOORS** or **DNG**, connectors for other tools, including proprietary tools, are available on request.

Example of the automatic test generation

In this example we can see the values of the tests automatically generated by the platform for the next requirement:

“While in **Fourth**, when **In_Speed** <= 60 && **In_Throttle** > 33 for 3 cycles **Gear_FSM** shall transition to **Third**”

This **requirement describes** when a gearbox should shift from fourth to third gear depending on the speed and pressure on the throttle.

These tests have been generated for **Statement coverage** (SC), **Decision coverage** (DC) and **Decision/Condition Coverage** (DCC). **Condition Coverage** (CC) and **Modified Condition/Decision Coverage** (MCDC) and **Boundary-value analysis** are also available. In this view you can see each testcase per each requirement.

[13]: While in **Fourth** when (**In_Speed** <= 60 && **In_Throttle** <= 33) || (**In_Speed** <= 75 && **In_Throttle** > 33) **Gear_FSM** shall transition to **Third**.

COVERAGE

Decision Condition 100%Statement 100%Decision 100%

EXPAND ALLCOLLAPSE ALL

Req_13_Statement_1

Req_13_Decision_1

Req_13_DC_1

Req_13_DC_2

Req_13_DC_3

Req_13_DC_4

Req_13_DC_5

Req_13_DC_6

Req_13_DC_10

Req_13_DC_11

Req_13_DC_12

^ [Req_13_DC_1]

DC: for trigger (**In_Speed** <= 60 & **In_Throttle** <= 33) | (**In_Speed** <= 75 & **In_Throttle** > 33), independently activate: (**In_Speed** <= 60 & **In_Throttle** <= 33) .

SIGNALS	0	1	2	3	4
In_Throttle	0	34	34	34	33
In_Speed	0	26	46	76	60
FSM_var	First (0)	Second (1)	Third (2)	Fourth (3)	Third (2)
Out_Gear	First (0)	Second (1)	Third (2)	Fourth (3)	Third (2)

^ [Req_13_DC_2]

DC: for trigger (**In_Speed** <= 60 & **In_Throttle** <= 33) | (**In_Speed** <= 75 & **In_Throttle** > 33), independently activate: (**In_Speed** <= 60 & **In_Throttle** <= 33) . Check that the response is already true and stays true when the precondition is re-activated

SIGNALS	0	1	2	3	4	5
In_Throttle	0	34	33	34	33	33
In_Speed	0	25	16	46	61	60
FSM_var	First (0)	First (0)	Second (1)	Third (2)	Fourth (3)	Third (2)
Out_Gear	First (0)	First (0)	Second (1)	Third (2)	Fourth (3)	Third (2)

^ [Req_13_DC_3]

DC: for trigger (**In_Speed** <= 60 & **In_Throttle** <= 33) | (**In_Speed** <= 75 & **In_Throttle** > 33), independently activate: (**In_Speed** <= 60 & **In_Throttle** <= 33) . Check that the response is false and becomes true when the precondition is activated.

^ [Req_13_DC_4]

DC: for trigger (**In_Speed** <= 60 & **In_Throttle** <= 33) | (**In_Speed** <= 75 & **In_Throttle** > 33), independently activate: (**In_Speed** <= 75 & **In_Throttle** > 33).

^ [Req_13_DC_5]

DC: for trigger (**In_Speed** <= 60 & **In_Throttle** <= 33) | (**In_Speed** <= 75 & **In_Throttle** > 33), independently activate: (**In_Speed** <= 75 & **In_Throttle** > 33). Check that the response is already true and stays true when the precondition is re-activated

Seamless Integration with testing tools.



With our connectors it is possible to execute the tests generated in our platform in testing tools such as **Simulink Test**, **CxxTest**, or **Vectorcast** with just a few clicks. Connectors for other testing tools, including in-house tools, are available on request.



DEVELOPAIR TECHNOLOGIES

Paseo de Miramón, 170, 3rd Floor, Office 21
20014 • Donostia-San Sebastián
Gipuzkoa (Spain)



+34 637 22 88 12



info@developair.es



www.developair.tech